


M3 Quick Start Guide

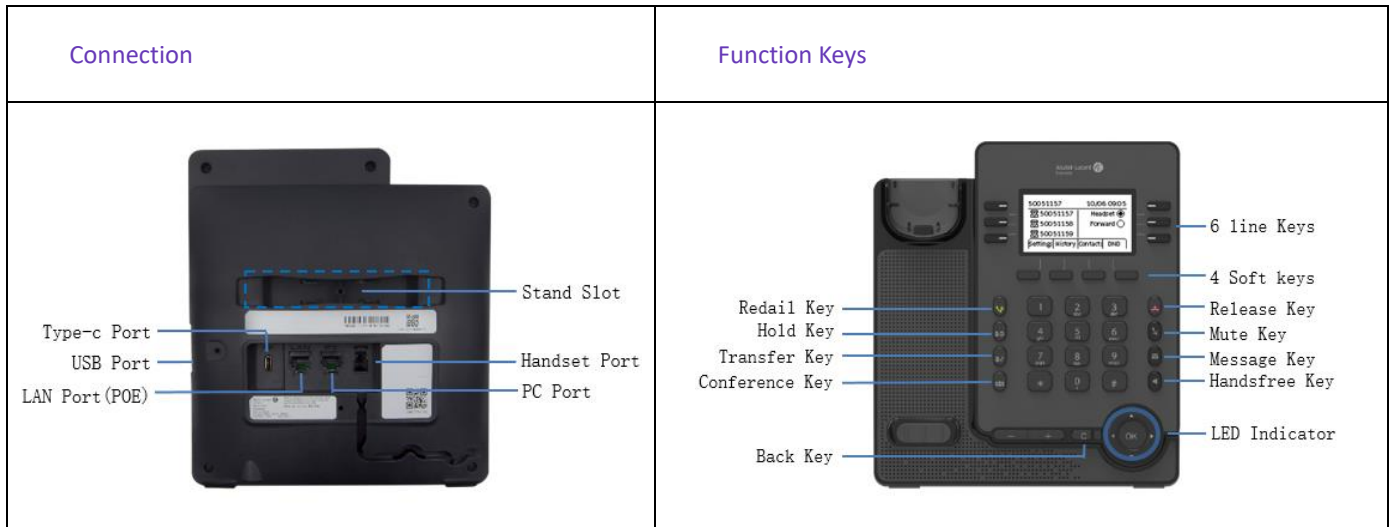

Change Language: English by default. Phone UI change path: Menu --> Basic Setting --> Language.

1. Configuring network

Dynamic mode by default. Phone UI change path: Menu --> Advanced Setting (default password 123456) --> Network --> IP Config --> IPv4 settings --> IPv4 Mode.


2. Configuring account

Users can configure account via phone UI or WEB UI. WEB UI example.

Step 1: Pressing "OK" key to view the IP address

Step 2: Entering https://IP address on the browser. Login with "admin" and password "123456"

Step 3: Configuring account as below

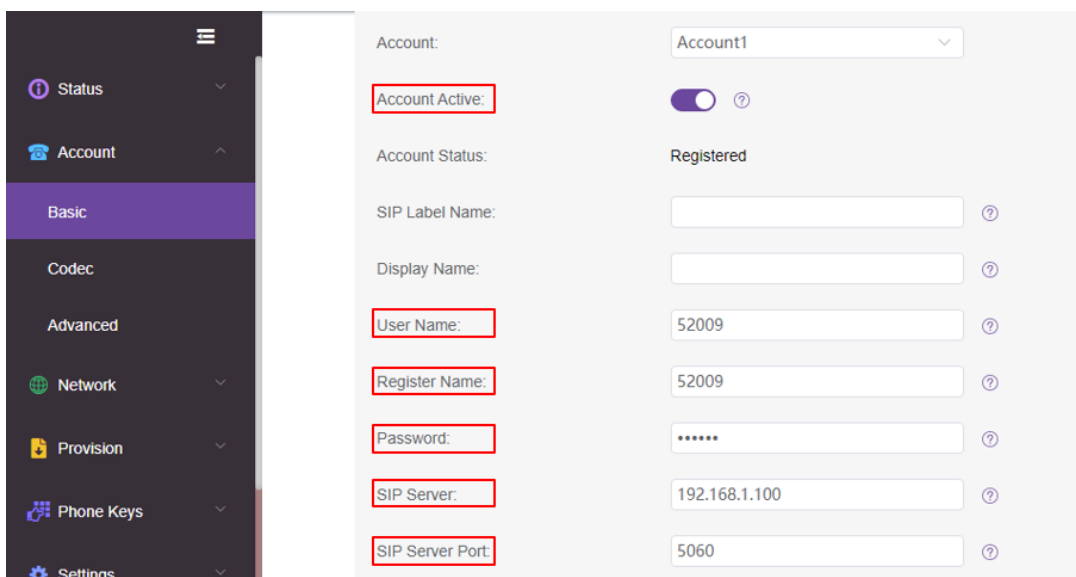

Note: Marked items are mandatory. Please contact service provider for detail.

Step 4: Account status shows "Registered" when the SIP account is registered successfully.